


HY-V230-L

50-60 Hz

3-stage

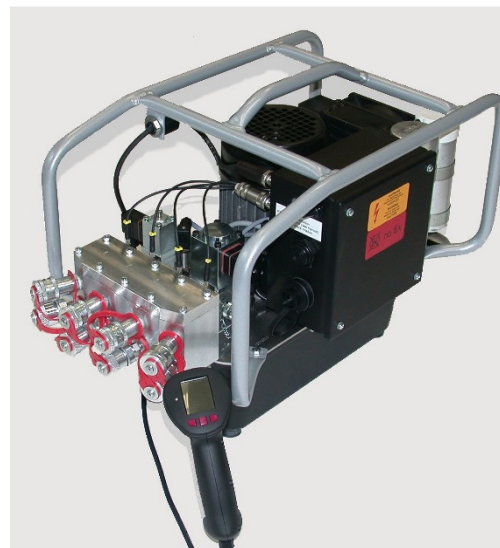

Grid-Requirement / Netzanforderung:

HY-V230-L: 1Ph 200-230V / 50+60Hz

Power / Leistung:

230V: 1,5 kW / 2,0 HP - 9 Ampere

Dimensions / Abmessungen:

A = 22,0" (559 mm)

B = 12,8" (326 mm)

C = 16,8" (426 mm)

Weight / Gewicht:

~79 lbs (36 kg) – without oil

General with:

Oilcooler

Remote control – 15 ft (5 m) length

Tank G8: volume = 2,1 Gal (8 Ltr.)

Full-automatic (4-Tool) (-FA4)

Option:

Full-automatic (1-Tool) (-FA1) (in preparation)

Remote control – 30 ft (10 m) length

Docum. –System (-DOC) (in preparation)

Torque & Angle (-TA) (in preparation)

Specifications:

50Hz

60Hz

Max. oil flow:

620 cu.in./min. (10,0 l/min.)

740 cu.in./min. (12,0 l/min.)

up to 1000 psi (70 bar)

Middlepressure oil flow:

120 cu.in./min. (2,0 l/min.)

145 cu.in./min. (2,4 l/min.)

up to 4000 psi (300 bar)

Highpressure oil flow:

55 cu.in./min. (0,9 l/min.)

65 cu.in./min. (1,1 l/min.)